Captiva Sunroof

Quick reference guide

⚠Warning

Always observe the following precautions:

Do not place fingers or objects near the sunroof when operating.

Do not place heavy objects on or around the sunroof.

Remove debris from the outside of the sunroof.

When leaving the vehicle unattended, close the sunroof fully.

As at all other times, all occupants must wear their safety belts whether the sunroof is open or closed.

Failure to observe these precautions may result in personal injury or damage to your vehicle.

Fitting an aftermarket sunroof may void the New Vehicle Voluntary Warranty on your vehicle and could result in injury to the vehicle occupants in the event of an accident.

The sunroof:

- Will operate with the ignition in the ACC or ON positions.
- Can be raised or can slide back into the roof.

The sunroof switch is located between the sun visors.

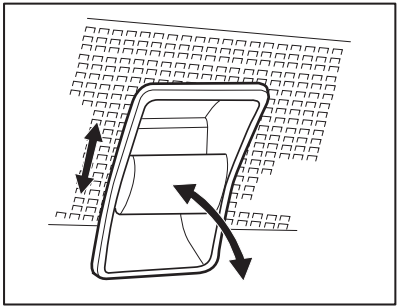

Open or close

- Slide the switch rearward and release to open the sunroof.
- Slide the switch forward or rearward to stop movement.
- Slide the switch forward and hold to close sunroof.

Raise or close

- Press and hold the switch to raise the sunroof.
- Pull and hold the switch to close the sunroof.

Sunblind

The sunblind opens automatically with the sunroof or can be manually operated.

The sunblind must be manually closed and cannot be closed with the sunroof open.

Note

The sunblind must be manually operated when the sunroof is raised.

Cleaning and maintenance

Regularly clean the glass, seals and roof flanges with a moist, soft cloth.

Caution
The tinted glass panel on the sunroof is heat and UV resistant. Ensure that due care is taken when cleaning.

Printed in Australia
Part no. 92265988
January 2012
(MY11 Captiva sunroof operation. Print 3)
© 2012 GM Holden Ltd
Reproduction in whole or part is prohibited without written approval from GM Holden Ltd, ABN 84 006 893 232

HOLDEN

This supplement should be kept together with the owner's handbook in the glovebox of your vehicle.